

# COLOURS AND DECORS

COMMERCIALLY AVAILABLE STOCK




A basic and most used material for manufacturing the visual elements on DEKMETAL facades is galvanized sheet steel with an organic coating at a thickness of 1.00 mm.

Visual elements are manufactured in the S280-320GD (ZM140) construction steel variation with a polyester finish of SP 25 microns, for metallic colours (9006 and 9007) then as PU 35 microns with RC4 corrosion resistance. We routinely stock 16 basic colours and 2 wood decors in this specification.

WWW.DEKMETAL.COM




PURE WHITE

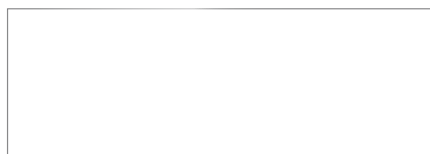

RAL 9010 | SP 25 | 2W690

GREY WHITE

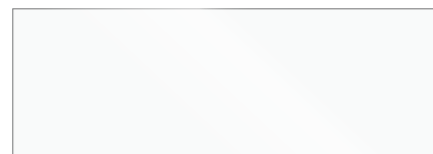

RAL 9002 | SP 25 | 2W007

LIGHT GREY



RAL 7035 | SP 25 | 2G330

WHITE ALUMINIUM (METALLIC)



RAL 9006 | PU 35 | 7A546

BEIGE ALDER



SP 35 | LIGHT WOOD

ALDER BERNSTEIN



SP 35 | DARK WOOD

WHITE ALUMINIUM (METALLIC)




RAL 9006 | PUR 55 | GHDX06

WHITE ALUMINIUM (METALLIC)



RAL 9006 | PUR 55 | E0906

GREY ALUMINIUM (METALLIC)

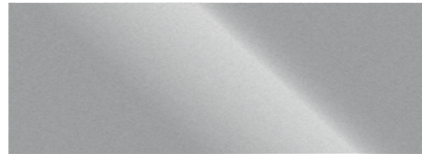


RAL 9007 | PU 35 | 7A050

GRAPHITE GREY



RAL 7024 | SP 25 | 2G150

GRAPHITE GREY (TEXTURED)

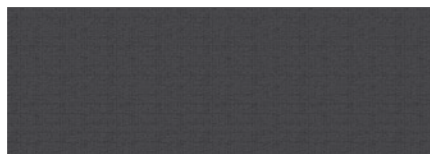

RAL 7024 | SP 35 TEX | 2G55A

ANTHRACITE GREY




RAL 7016 | PU 35 | 7G082

SIGNAL BLACK (TEXTURED)



RAL 9004 | SP 35 TEX | 2N09A

JET BLACK



RAL 9005 | SP 25 | 2N068

FLAME RED



RAL 3000 | PU 35 | 7R216

GENTIAL BLUE



RAL 5010 | SP 25 | 2B324